

SUCCESS STORIES

AQUA-AEROBIC SYSTEMS, INC.

PLANT NAME/LOCATION: Colorado Springs, CO WWTP

TYPE OF PLANT: Municipal/Domestic

AVERAGE DAILY FLOW: 65 MGD (246,054 m³/day)

AQUA-AEROBIC PRODUCTS: (20) 7.5 HP AquaDDM[®] Mixers, (3) 3 HP AquaDDM Mixers with Directional Elbows, and (1) 3 HP AquaDDM Mixer without an Elbow

COLORADO SPRINGS CHOSE AQUADDM[®] MIXERS OVER SUBMERSIBLE DIRECTIONAL MIXERS FOR OPTIMUM ANOXIC MIXING

The city of Colorado Springs in Colorado currently operates a 65 mgd wastewater treatment facility. To help meet the stringent water quality standards for denitrification, the facility has employed (20) 7.5 hp AquaDDM mixers. In 1994, Colorado Springs opted to install (20) AquaDDM mixers instead of installing submerged directional mixers.

Four AquaDDM mixers are used in each of five anoxic basins to partition anoxic zones into four compartments. Utilizing the mixers in this manner accomplishes mixing of the influent and provides a completely mixed environment (every



constituent in the reactor exists at a uniform concentration at every point in the reactor) necessary for successful denitrification, without aeration. The need for tank baffles in the anoxic zones is eliminated due to the AquaDDM mixer's integrated flow vanes and lower input torque.

The mixers are equipped with a pivotal mooring arm to provide ease of maintenance for the plant operators. Located on the walkway at each quadrant of the anoxic basin are recessed ports with removable cross section grating. Operators can remove the grating and use the attached mooring cable to pull the mixers to the port

(shown in the photo above). They can then attach a winch to the lifting harness on the mixer motor. This arrangement provides total support during routine maintenance of the mixer without removing it from the basin.

A few years ago, the plant also replaced 30 submerged units that were being used in its Primary Effluent Channel with (3) 3 hp AquaDDM mixers with directional elbows and (1) AquaDDM mixer without an elbow. Since replacing these submerged units, the plant has saved significant costs on power, labor and maintenance.



PRODUCTS

Aqua-Jet®
Surface Aerator

Aqua-Jet II®
Contained Flow Aerator

AquaABF®
Automatic Backwash Filter

MixAir®
Aeration System

AquaDDM®
Direct Drive Mixer-Blender

AquaSBR®
Sequencing Batch Reactor

AquaDisk®
Cloth-Media Filter

AquaDiamond™
Cloth-Media Filter

AquaDrum™
Cloth-Media Filter

ThermoFlo®
Spray Cooler

Aqua EnduraDisc®
Fine Bubble Diffuser

Aqua EnduraTube™
Fine Bubble Diffuser

Aqua CB-12™
Coarse Bubble Diffuser

Aqua CB-24®
Coarse Bubble Diffuser

AquaMB Process™
Multiple-Barrier
Membrane System

MSBR®
Modified Sequencing
Batch Reactor

SERVICES

Process and Mechanical
Engineering

Quality Manufacturing

Aftermarket Sales &
Service

International Expertise

CONTACT US


Aqua-Aerobic Systems, Inc.
6306 N. Alpine Rd.
Rockford, IL 61111

Phone: 815.654.2501
Fax: 815.654.2508

www.aqua-aerobic.com

AQUADDM® MIXER PROCESS

The AquaDDM mixer is designed to provide maximum mixing efficiency as an independent mixing source or in conjunction with aeration devices. It establishes a powerful downflow, toroidal mixing pattern that transports surface liquid downward and increases mass transfer. Flow entrainment and regenerative flow create high reactor turnover rates for efficient mixing.

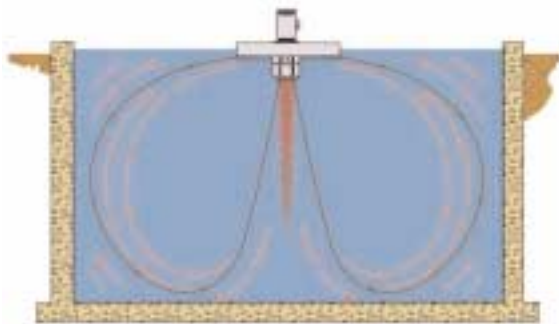

DESIGN CHARACTERISTICS

The Colorado Springs treatment plant has an average daily flow of 65 mgd (246,054m³/day). It employs (20) 7.5 hp AquaDDM mixers in its five anoxic basins, and (3) 3 hp AquaDDM mixers with directional elbows and (1) 3 hp AquaDDM mixer without an elbow in its primary effluent channel which feeds into the five basins.

AQUADDM® MIXER ADVANTAGES:

- Simple physical construction makes handling easy
- Lower initial cost, and less expensive to install and maintain than gear reduced (slow speed) units
- Direct Drive design eliminates expensive and time consuming gearbox maintenance

- One-piece stainless steel shaft means no couplings and no submerged bearings
- Suitable for most basin configurations
- High efficiency mixing reduces power consumption
- Eliminates need for tank baffling or counter rotational equipment
- Eliminates short-circuiting and deadspots in the basin
- Eliminates or greatly reduces surface splashing and foaming
- Anti-erosion plate available for use in earthen basins, or basins with synthetic liners
- Directional flow option available

According to Plant Team Leader, Jay Hardeson, "The AquaDDM mixers were chosen due to the low maintenance requirements, and because they are direct-drive units, there are no gear boxes to contend with".



One of five anoxic basins utilizing AquaDDM mixers with a pivotal mooring arm.